






TEMSA





SAFARI HD

TECHNICAL SPECIFICATIONS

SAFARI HD 12
53+1+1

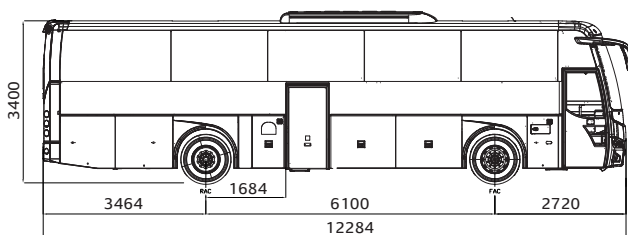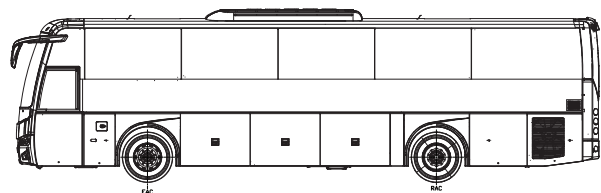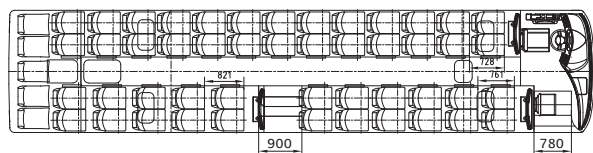

SAFARI HD 13
55+1+1

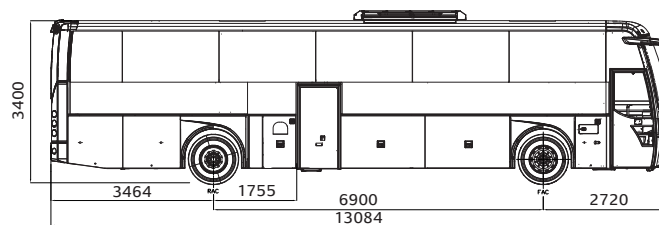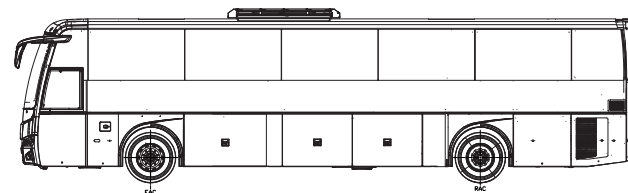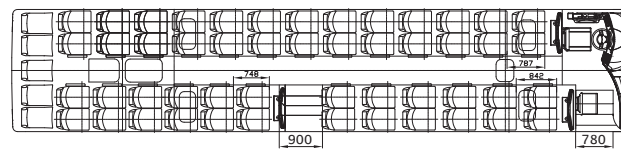

TOURING

Value in motion

SAFARI HD

TECHNICAL SPECIFICATIONS



MODEL	SAFARI HD 12	SAFARI HD 13
DIMENSIONS		
Overall length (mm)	12,284	13,084
Overall width (mm)		2,550
Overall height (mm)		3,610 (with A/C)
Overhang front / rear (mm)		2,720 / 3,464
Wheelbase (mm)	6,100	6,900
Luggage compartment (m³)	10	11
WEIGHT		
Max. gross vehicle weight (kg)	18,000	
STRUCTURE		
Type	Frameless monocoque chassis in stainless steel	
ENGINE		
Model	E5 DAF MX 300 408 hp U1 (EEV option)	
Number of cylinders / piston displacement (cc)	6 in line / 12.9	
Maximum output (EEC)	300 kW / 408 hp / 1,900 rpm	
Maximum torque (EEC)	2,000 Nm / 1,000-1,410 rpm	
TRANSMISSION		
Model	ZF 6S 1,900 with retarder & ZF 6S 1,901 with intarder & ZF ASTRONIC 12 AS 2001, electronic transmission with intarder (option)	
CLUTCH		
Type	Hydraulic controlled, single dry plate with pressure assistance	
RETARDER		
Model	TELMA (with ZF 6S 1,900 transmission)	
AXLES		
Axle front / rear	ZF RL 75 - E independent / ZF A132 - rigid	
Ratio	3.23 / 3.54	
SUSPENSION		
Front	Independent suspension with adjustable shock absorbers and torsion bar type stabiliser x 2 air bellows	
Rear	Rolling diaphragm type with adjustable shock absorbers x 4 air bellows	
BRAKES		
Service brake	Full dry air, dual circuit with auto slack adjusters / exhaust brake / disc brakes at front and rear	
TYRES AND WHEELS		
Tyre size	295 / 80 R 22,5	
STEERING		
Model	RBL C-700 V	
ELECTRICAL SYSTEM		
System voltage / battery	24 V / 2 x 12 V, 225 Ah	
FUEL SYSTEM		
Fuel tank capacity / Adblue tank capacity	560 L + 170 L extra tank (option) / 45 L	
PASSENGER CAPACITY		
Max. seating arrangement	53+1+1	55+1+1
HEATING AND AIR CONDITIONING SYSTEM		
Driver area	Defroster for heating and cooling the driver's place and defrosting the windscreen	
Passenger compartment / air conditioner	Full automatic convector system / roof type air conditioning unit 35 kW	
STANDARD EQUIPMENT		
Exhaust brake • double glazing • curtains • air conditioning with roof heating • standard rims • body levelling • electrically operated sun visor • assistant seat • radio-CD / MP3 player • microphone in driver seat • fog lights • low voltage warning • 2nd alternator • carpet in steps / driver area / aisle • basic std. colour: White RAL4332 • pre-heater • DVD player / 19" LCD monitor • bottle cooler		

MAIN FEATURES

EEV, stainless steel, 85% recyclable, 99% recoverable

EBS, ESC, ASR

Luxurious interior applications

www.temsa.com

The information in this publication is accurate as of its publication date. The information herein is subject to change without prior notice. Specifications may differ per country. Consult your sales representative for features and specifications that match your requirements. Copyright © 2010 Temsa Global. All rights reserved.